

Radial grippers DHRS

FESTO



Radial grippers DHRS

Key features

FESTO

At a glance

General information


- Lateral gripper jaw support for high torque loads
- Self-centring
- Gripper jaw centring options
- Max. repetition accuracy
- Gripping force retention
- Internal fixed flow control
- Wide range of options for mounting on drive units
- Sensor technology:
 - Adaptable position sensor for the small gripper sizes
 - Integratable proximity sensors for the medium and large gripper sizes

Flexible range of applications


- Can be used as a double-acting and single-acting gripper
- Compression spring for supplementary or retaining gripping forces
- Suitable for external and internal gripping

The technology in detail

Gripper closed



Gripper open

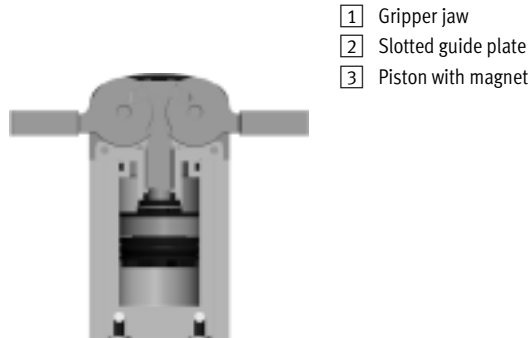

- 1 Gripper jaw
- 2 Slotted guide plate
- 3 Piston with magnet

- Note
Gripper selection
sizing software
→ www.festo.com

Position sensing/force control

With position transmitter SMAT-8M



- Analogue positional feedback possible
- Analogue output 0 ... 10 V

With proportional pressure regulator VPPM



- Infinite adjustment of the gripping force possible
- Setpoint input
 - 0 ... 10 V
 - 4 ... 20 mA

With proximity sensor SMT-8G



- Multiple positions can be sensed:
- Open
 - Closed
 - Workpiece gripped


Radial grippers DHRS

Key features

FESTO



Supply ports

At the side




Mounting options

At the side

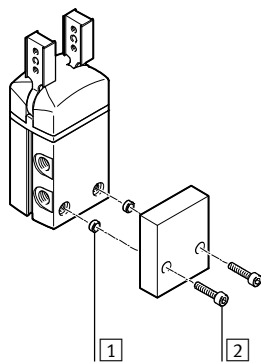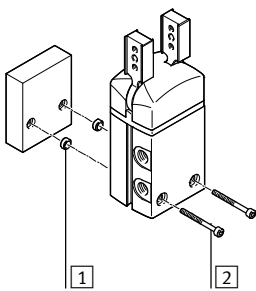


From underneath

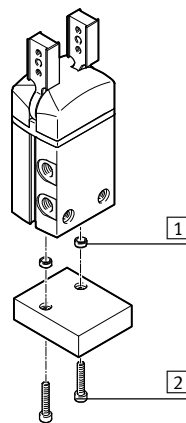

- 1 Centring sleeves
- 2 Mounting screws


Mounting options for external gripper fingers

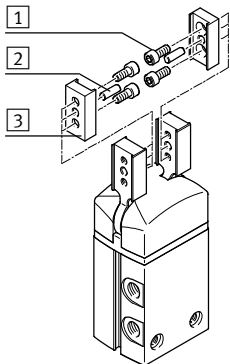


- 1 Mounting screws
- 2 Centring pins
- 3 Gripper fingers

Note


These grippers are not designed for the following or similar sample applications:



- Welding spatter



- Machining
- Aggressive media

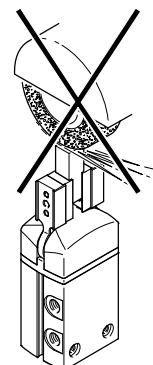

- Grinding dust


Radial grippers DHRS

Peripherals overview


FESTO

Peripherals overview


DHRS-10

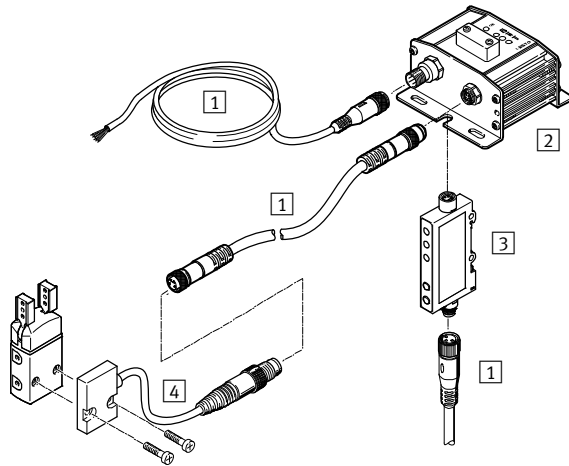


DHRS-16 ... 40

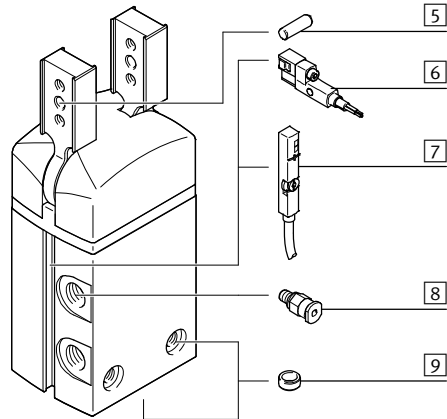

System product for handling and assembly technology

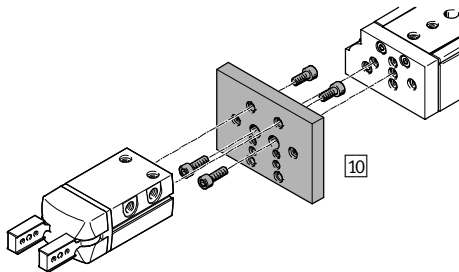

Proportional pressure regulator VPPM

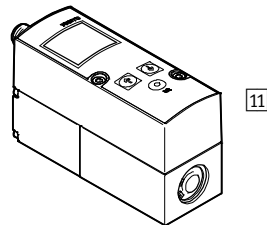

Radial grippers DHRS

Peripherals overview

FESTO

Accessories		
	Type	Brief description
		➔ Page/Internet
1	Connecting cable NEBU	For connecting evaluation unit and signal converter
2	Evaluation unit SMH-AE1	<ul style="list-style-type: none"> For evaluating signals for position sensor SMH-S1 For size 10
3	Signal converter SVE4	<ul style="list-style-type: none"> For evaluating signals for position sensor SMH-S1 For size 10
4	Position sensor SMH-S1	<ul style="list-style-type: none"> Adaptable and integratable sensor technology, for sensing the piston position For size 10
5	Centring pin	For centring the gripper fingers on the gripper jaws
6	Proximity sensor SMT-8G	<ul style="list-style-type: none"> For sensing the piston position Proximity sensor does not project past the housing at the bottom For size 16 ... 40
7	Position transmitter SMAT-8M	<ul style="list-style-type: none"> Continuously senses the position of the piston. Has an analogue output with an output signal in proportion to the piston position For size 16 ... 40
8	Push-in fitting QS	For connecting compressed air tubing with standard O.D.
9	Centring sleeve ZBH	<ul style="list-style-type: none"> For centring the gripper during mounting The scope of delivery of the gripper includes 2 centring sleeves
10	Adapter kit HMSV, HAPG, HAPS, HMVA	Connecting plate between drive and gripper
11	Proportional pressure regulator VPPM	For infinite adjustment of the gripping force

Radial grippers DHRS



Type codes

		DHRS	—	16	—	A	—	
Type								
DHRS	Radial gripper							
Size								
Position sensing								
A	Via proximity sensor							
Gripping force retention								
NC	Closing							

Radial grippers DHRS


Technical data

FESTO

Function

Double-acting

DHRS-...-A



Size
10 ... 40 mm

Opening angle
180°

www.festo.com

Function – Variants

Single-acting or
with gripping force retention ...

... closing DHRS-...-NC



General technical data						
Size	10	16	25	32	40	
Design	Forced motion sequence					
Mode of operation	Double-acting					
Gripper function	Radial					
Guide	Plain-bearing guide					
Gripping force retention	–	NC	NC	NC	NC	
Number of gripper jaws	2					
Opening angle per gripper jaw	[°]	90				
Pneumatic connection	M3	M3	M5	G1/8	G1/8	
Repetition accuracy ¹⁾	[mm]	≤±0.1				
Max. interchangeability	[mm]	≤±0.2				
Max. operating frequency	[Hz]	4			3	2
Rotational symmetry	[mm]	< Ø 0.2				
Position sensing	Via position sensor		Via proximity sensor, position transmitter			
Type of mounting	Via through-hole and centring sleeve					
	Via female thread and centring sleeve					
Mounting position	Any					

1) End-position drift under constant conditions of use with 100 consecutive strokes in the direction of movement of the gripper jaws

Operating and environmental conditions					
Size	10	16	25	32	40
Min. operating pressure					
DHRS-...-A	[bar]	2			
DHRS-...-A-NC	[bar]	–	4		
Max. operating pressure	[bar]	8			
Operating medium	Compressed air in accordance with ISO 8573-1:2010 [7:4:4]				
Note on operating/pilot medium	Operation with lubricated medium possible (in which case lubricated operation will always be required)				
Ambient temperature ¹⁾	[°C]	+5 ... +60			
Corrosion resistance class CRC ²⁾	1				

1) Note operating range of proximity sensors

2) Corrosion resistance class 1 according to Festo standard 940 070

Components subject to low corrosion stress. Transport and storage protection. Parts that do not have primarily decorative surface requirements, e.g. in internal areas that are not visible or behind covers.

Weight [g]					
Size	10	16	25	32	40
DHRS-...-A	44	114	270	480	829
DHRS-...-A-NC	–	118	277	490	844


Radial grippers DHRS

Technical data

FESTO

Materials


Sectional view



Radial gripper

1	Gripper jaw	High-alloy stainless steel
2	Cover cap	Polyamide
3	Slotted guide plate	Tempered steel
4	Piston	Polyacetal
5	Housing	Hard anodised wrought aluminium alloy
–	Seals	Nitrile rubber
–	Note on materials	Free of copper and PTFE
–		RoHS-compliant


Total gripping torque [Ncm] at 6 bar



The gripping torque is not constant within the opening angle → 12.

Size		10	16	25	32	40
DHRS-...-A	Opening	21	62	233	423	725
	Closing	15	55	215	390	660

Static characteristic load values at the gripper jaws

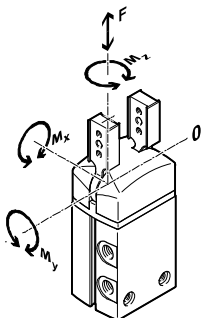


The indicated permissible forces and torques apply to a single gripper jaw. They include the lever arm, additional applied loads due to the workpiece or external gripper fingers and accelera-

tion forces occurring during movement.

The zero coordinate line (gripper jaw guide) must be taken into consideration for the calculation of torques.

Size		10	16	25	32	40
Max. permissible force F_z	[N]	30	40	75	120	200
Max. permissible torque M_x	[Nm]	0.8	1.3	3.2	6.2	14
Max. permissible torque M_y	[Nm]	0.8	1.3	3.2	6.2	14
Max. permissible torque M_z	[Nm]	0.8	1.3	3.2	6.2	14

Mass moment of inertia [kgm²x10⁻⁴]

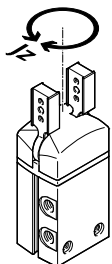

Mass moment of inertia of the radial gripper in relation to the central axis, without external gripper fingers, without load.

Size		10	16	25	32	40
DHRS-...-A		0.03	0.14	0.69	1.66	4.18
DHRS-...-A-NC		–	0.15	0.71	1.69	4.24


Radial grippers DHRS

Technical data

FESTO

Opening and closing times [ms] at 6 bar

Without external gripper fingers




The indicated opening and closing times [ms] were measured at room temperature at an operating pressure of 6 bar with horizontally mounted grippers without additional gripper

fingers (average values). The grippers must be throttled for greater applied loads. Opening and closing times must then be adjusted accordingly.


Size		10	16	25	32	40
Without external gripper fingers						
DHRS-...-A	Opening	35	61	102	111	113
	Closing	91	63	105	119	142
DHRS-...-A-NC	Opening	–	75	150	131	151
	Closing	–	43	96	88	110

Opening and closing times t to be set at 6 bar as a function of mass moment of inertia of the gripper fingers


DHRS-10

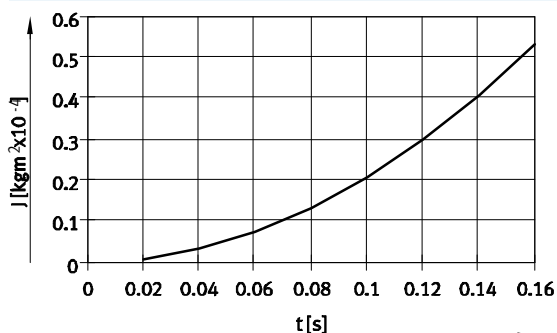


DHRS-16

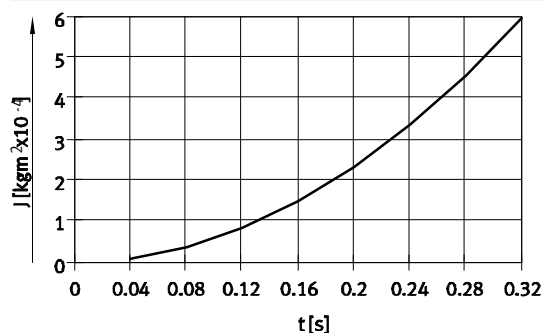


DHRS-25

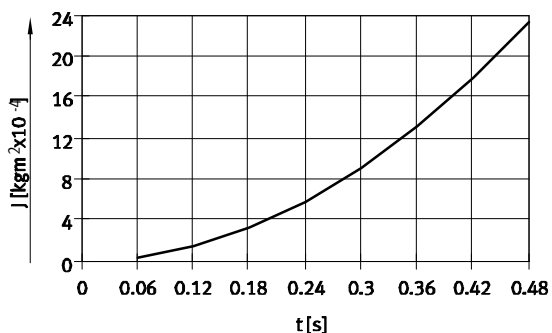

DHRS-32

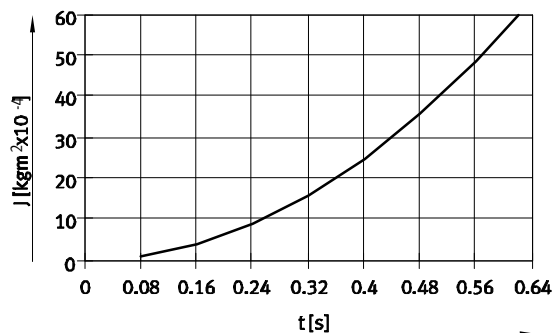

DHRS-40

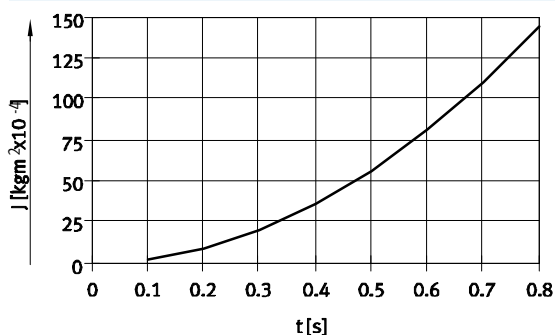

Radial grippers DHRS



Technical data

FESTO

Gripping force F_H per gripper jaw as a function of operating pressure and lever arm x

The gripping forces as a function of operating pressure and lever arm can be determined from the following graphs.

The gripping torque is not constant within the opening angle $\rightarrow 12$.

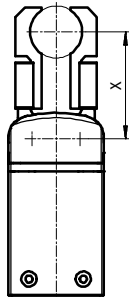


Note

Gripper selection
sizing software


www.festo.com

External gripping (closing)


DHRS-10

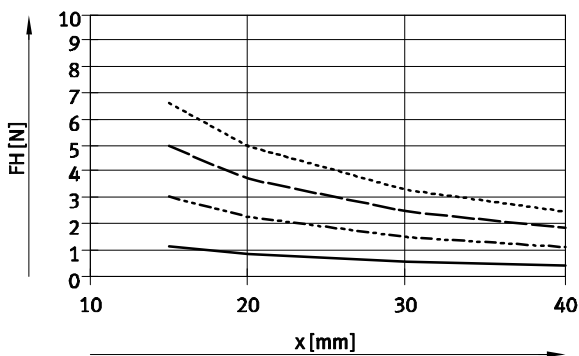


DHRS-16

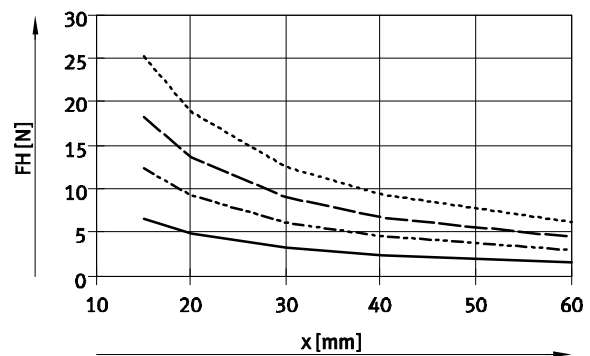


DHRS-25

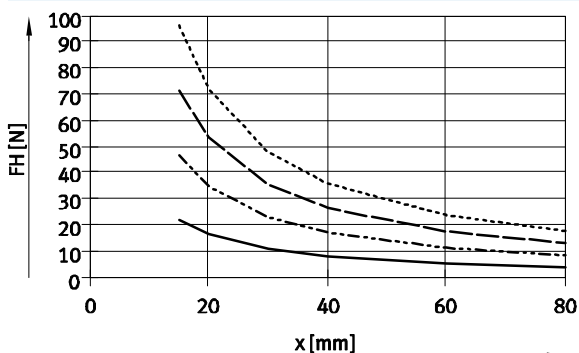

DHRS-32

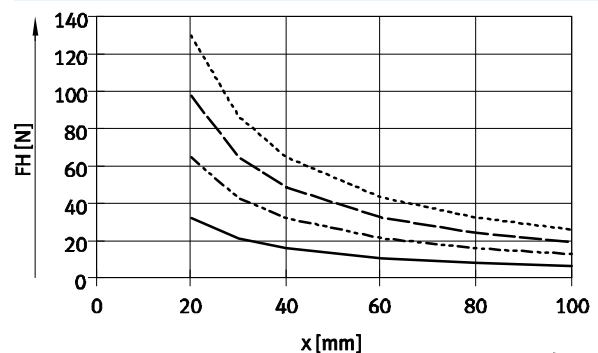

DHRS-40

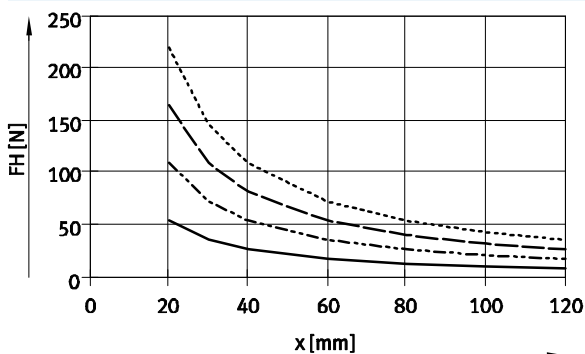

Radial grippers DHRS



Technical data

FESTO

Gripping force F_H per gripper jaw as a function of operating pressure and lever arm x

The gripping forces as a function of operating pressure and lever arm can be determined from the following graphs.


The gripping torque is not constant within the opening angle → 12.




Note
Gripper selection
sizing software
→ www.festo.com

Internal gripping (opening)


DHRS-10

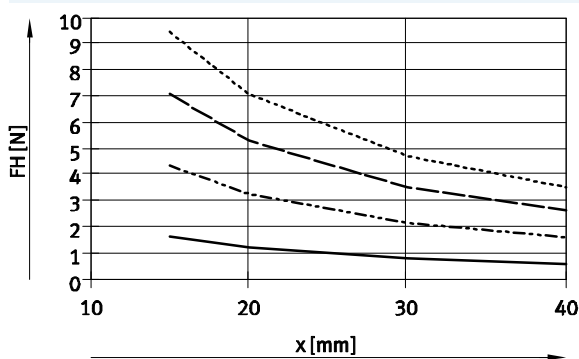


DHRS-16

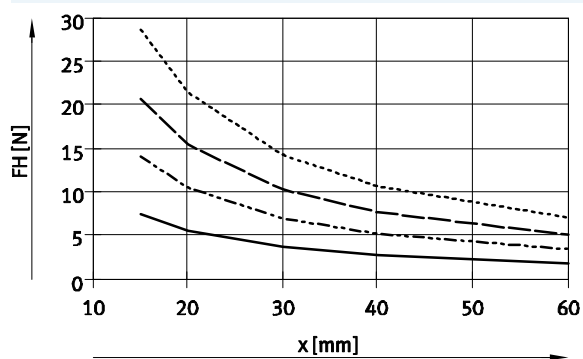


DHRS-25

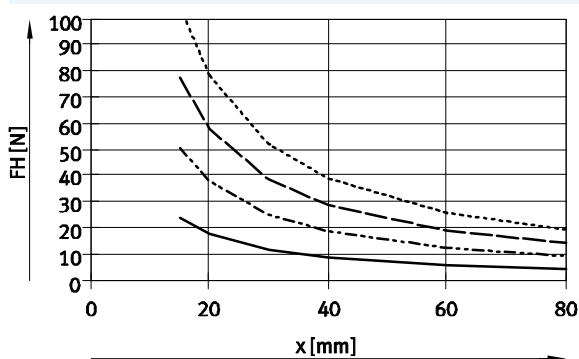

DHRS-32

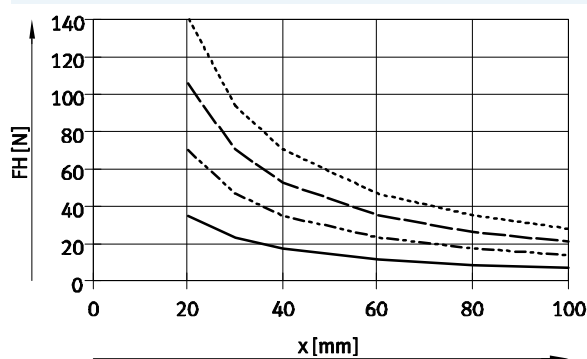

DHRS-40

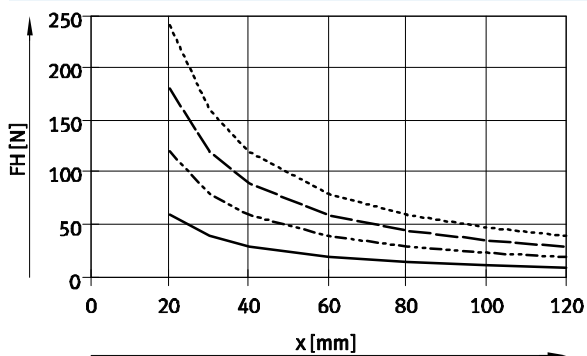

Radial grippers DHRS

Technical data


FESTO

Gripping force F_H per gripper jaw at 6 bar as a function of lever arm x and eccentricity a and b

The following formula must be used to calculate the lever arm x with eccentric gripping:

$$x = \sqrt{a^2 + b^2}$$

The gripping force F_H can be read from the graphs (→ 10/11) using the calculated value x .

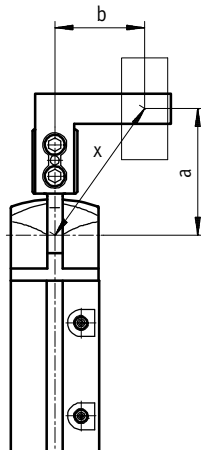

Calculation example

Given:

Distance $a = 25$ mm

Distance $b = 20$ mm

To be calculated:

The gripping force at 6 bar, with a DHRS-16, used as an external gripper


Procedure:

Calculating the lever arm x

$$x = \sqrt{25^2 + 20^2}$$

$$x = 32$$
 mm


The graph (→ 10) gives a value of $F_H = 8$ N for the gripping force.

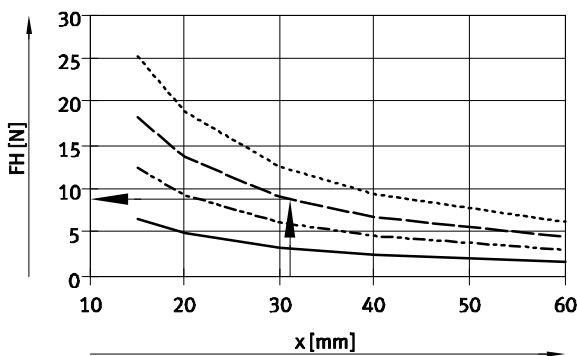

Torque curve M as a function of opening angle α

The drive principle of the gripper jaws means that the torque is not constant within the opening angle. The percentage of torque available in each case can be seen in the graph.

An opening angle of 0° means a parallel gripper jaw position.

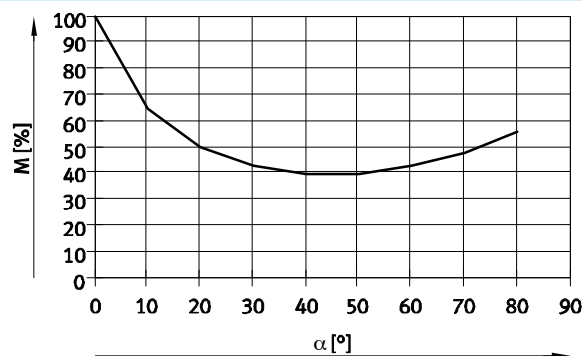


Radial grippers DHRS

Technical data

FESTO

Spring torque M_F as a function of opening angle α

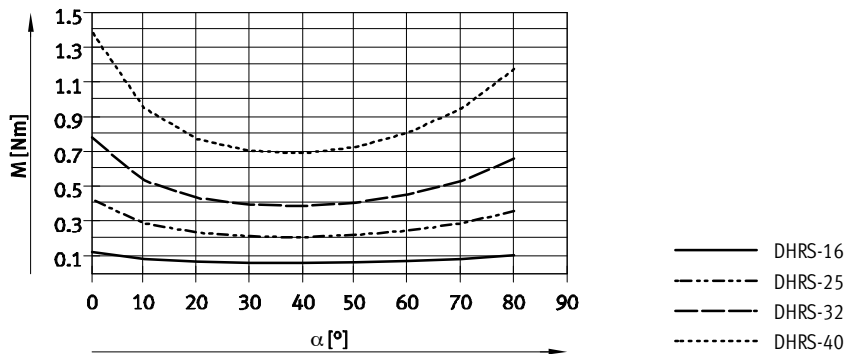

Determination of the actual gripping torques $M_{Grtotal}$ for DHRS-...-NC as a function of application

The radial gripper with integrated spring type DHRS-...-NC (closing gripping force retention) can be used as:

- single-acting grippers
- grippers with supplementary gripping force and
- grippers with gripping force retention depending on requirements.

In order to calculate the available gripping torque $M_{Grtotal}$ (per gripper jaw), the data from the graphs for the gripping force F_H (→ 10/11), the

torque curve (→ 12) and the spring torque M_F (→ 13) must be combined accordingly.

$$M_{Gr} = F_H \cdot x \cdot M [\%]$$

M_{Gr} Gripping torque
 F_H Gripping force
 x Lever arm
 M Torque curve

Application

Single-acting

- Gripping with spring force:
 $M_{Grtotal} = M_F$
- Gripping with pressure force:
 $M_{Grtotal} = M_{Gr} - M_F$

Supplementary gripping force

- Gripping with pressure and spring force:
 $M_{Grtotal} = M_{Gr} + M_F$

Gripping force retention

- Gripping with spring force:
 $M_{Grtotal} = M_F$


Radial grippers DHRS

Technical data

FESTO

Dimensions

Download CAD data → www.festo.com

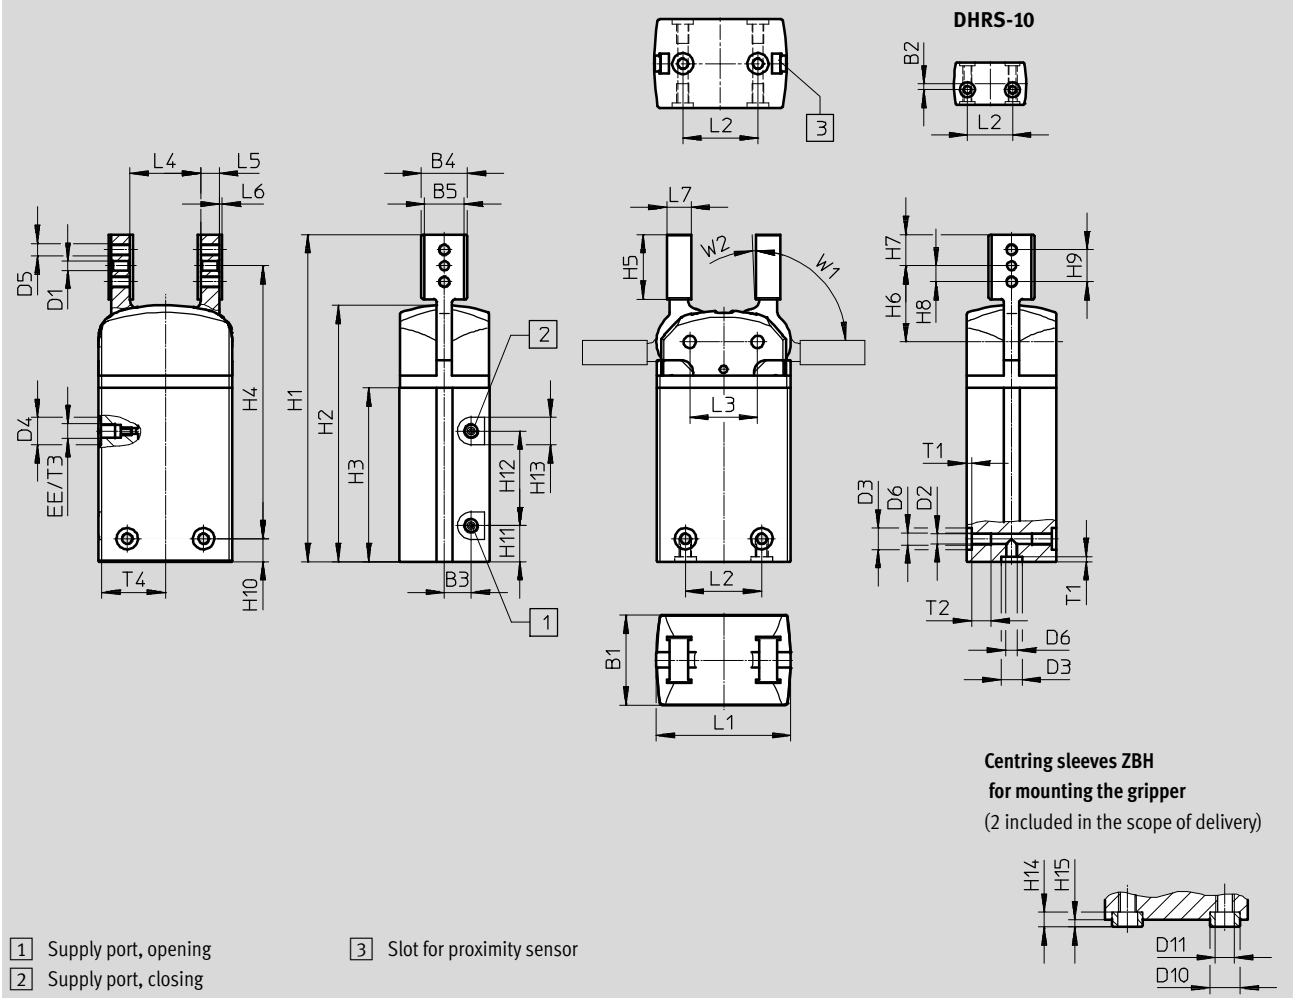

Size	B1	B2 ¹⁾	B3	B4	B5	D1	D2	D3	D4	D5	D6
[mm]	±0.05				+0.03/ +0.01	∅ H8	∅ +0.1	∅ H8/h7	∅		
10	14	2	2	8.5	6.5	2	2.4	5	7	M2.5	M3
16	19	–	5.8	14	10	2	2.5	5	–	M3	M3
25	29.5	–	8.75	15	13	3	3.3	7	9	M4	M4
32	38	–	11	16	14	4	5.1	9	15	M5	M6
40	49	–	11	24	20	5	6.4	12	15	M6	M8

Size	D10	D11	EE	H1	H2	H3	H4	H5	H6	H7
[mm]	∅ h7	∅					±0.25	±0.2	±0.05	–0.1
10	5	3.2	M3	60.8	46	30.8	42.25	13.8	14.95	6.25
16	5	3.2	M3	88.2	70.5	49	73.7	16.5	19.7	7
25	7	5.3	M5	107.2	84	57	89.45	21.2	24.95	10.25
32	9	6.4	G½	128.5	96.2	65	103.5	29.5	32	14
40	12	10.3	G½	140	108.4	71.5	108.7	29.5	33.7	13.8

1) Tolerance for centring hole ±0.02 mm; tolerance for thread ±0.1 mm

Radial grippers DHRS

Technical data

FESTO

Size [mm]	H8	H9	H10 ²⁾	H11	H12	H13	H14	H15	L1	L2 ¹⁾	L3
							−0.2	−0.3	±0.05		±0.02
10	4	8	12.3	8.8	16	7	2.4	1.2	24	15	12.4
16	4	8	7.5	12.25	23	7	2.4	1.2	33.4	16	17
25	5.25	10.5	7.5	11.8	31	9	3	1.4	44	25	22.2
32	7	14	11	20	25	15	4	1.9	51	29	25.8
40	8	16	17.5	9	46	15	5	2.4	59	33	30

Size [mm]	L4	L5	L6	L7	T1	T2	T3	T4	W1	W2
		±0.05			+0.1	+1	+0.5		±2°	+3°
10	12	4	0.5	5	1.2	through	3.5	11.6	90	2
16	21	4	1	6	1.2	5.8	4.5	16	90	2
25	23.2	6	1	8	1.6	6.4	4.5	21	90	2
32	24.8	8	1	10	2.1	12.9	6.5	24	90	2
40	29.6	10	1	12	2.6	13.4	6	28.4	90	2

1) Tolerance for centring hole ±0.02 mm, tolerance for thread ±0.1 mm

2) Tolerance for centring hole −0.05 mm, tolerance for thread ±0.1 mm

Ordering data					
Size [mm]	Double-acting without compression spring		Single-acting or with gripping force retention		
			Closing		
	Part No.	Type	Part No.	Type	
10	1310159	DHRS-10-A	–		
16	1310160	DHRS-16-A	1310161	DHRS-16-A-NC	
25	1310162	DHRS-25-A	1310163	DHRS-25-A-NC	
32	1310164	DHRS-32-A	1310165	DHRS-32-A-NC	
40	1310166	DHRS-40-A	1310167	DHRS-40-A-NC	

Radial grippers DHRS

Accessories

FESTO







Adapter kit
HMSV, HAPG, HAPS, HMVA, DHAA

Material:
Wrought aluminium alloy
Free of copper and PTFE
RoHS-compliant



Note

The kit includes the individual mounting interface as well as the necessary mounting material.

Permissible drive/gripper combinations with adapter kit					Download CAD data → www.festo.com		
Combination	Drive Size	Gripper Size	Mounting option		Adapter kit		
					CRC ¹⁾	Part No.	Type
DGSL/DHRS	DGSL	DHRS			HMSV		
	8, 10	10	■	■	2	548784	HMSV-54
	12, 16	16	■	■		548785	HMSV-55
	20, 25	25, 32	■	■		548786	HMSV-56
SLT/DHRS	SLT	DHRS			HAPS		
	10	10	■	–	2	178448	HAPS-2
	16	16	■	–		178449	HAPS-3
	20	25	■	–		178450	HAPS-4
	25	32	■	–		178451	HAPS-5
DPZ/DHRS	DPZ	DHRS			HAPG		
	10, 16	16	■	–	2	163250	HAPG-1
	16	25	■	–		163251	HAPG-2
	20	25	■	–		163252	HAPG-3
	25, 32	32	■	–		163253	HAPG-4
HMP/DHRS	HMP	DHRS			HMSV		
	Direct mounting						
	16, 20	16	■	■	2	177666	HMSV-20
	16, 20, 25	25	■	■		177761	HMSV-21
	16, 20, 25, 32	32	■	■		177762	HMSV-22
	25	40	■	■		177763	HMSV-23
	32	40	■	■		177764	HMSV-24
	Dovetail mounting						
	16, 20	16	■	■	2	177767	HMSV-27
	16, 20, 25	25	■	■		177768	HMSV-28
	16, 20, 25, 32	32	■	■		177769	HMSV-29
	25	40	■	■		177770	HMSV-30
	32	40	■	■		178211	HMSV-31

1) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.


Radial grippers DHRS




Accessories

FESTO

Adapter kit
HMSV, HAPG, HAPS, HMVA, DHAA

Material:
Wrought aluminium alloy
Free of copper and PTFE
RoHS-compliant

 **Note**
The kit includes the individual mounting interface as well as the necessary mounting material.

Permissible drive/gripper combinations with adapter kit					Download CAD data → www.festo.com		
Combination	Drive	Gripper			Adapter kit		
	Size	Size	Mounting option		CRC ¹⁾	Part No.	Type
							
DGP..., DGE-..., DGEA/DHRS	DG...	DHRS			HMVA, HAPG, HMSV		
	Direct mounting						
	18 ²⁾ , 25 ³⁾	10	■	■	2	196788	HMVA-DLA18/25
						192706	HAPG-37-S1
	40 ³⁾	10	■	■		196790	HMVA-DLA40
						192706	HAPG-37-S1
	18 ²⁾ , 25 ³⁾	16	■	■		196788	HMVA-DLA18/25
						192705	HAPG-36-S1
	40 ³⁾	16	■	■		196790	HMVA-DLA40
						192705	HAPG-36-S1
	18 ²⁾ , 25 ³⁾	25	■	■		196788	HMVA-DLA18/25
						193922	HAPG-37-S4
	40 ³⁾	25	■	■		196790	HMVA-DLA40
						193922	HAPG-37-S4
	Dovetail mounting						
	18 ²⁾ , 25	16	■	■	2	196788	HMVA-DLA18/25
						177767	HMSV-27
	40	16	■	■		196790	HMVA-DLA40
						177767	HMSV-27
	18 ²⁾ , 25	25	■	■		196788	HMVA-DLA18/25
						177768	HMSV-28
	40	25	■	■		196790	HMVA-DLA40
						177768	HMSV-28
	40	32	■	■		196790	HMVA-DLA40
						177769	HMSV-29
	40	40	■	■		196790	HMVA-DLA40
						177770	HMSV-30

- 1) Corrosion resistance class 2 according to Festo standard 940 070
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.
- 2) Only for DGEA-...
- 3) Only for DGE.../DGP...

Radial grippers DHRS

Accessories

FESTO





Adapter kit
HMSV, HAPG, HAPS, HMVA, DHAA

Material:
Wrought aluminium alloy
Free of copper and PTFE
RoHS-compliant



Note

The kit includes the individual mounting interface as well as the necessary mounting material.

Permissible drive/gripper combinations with adapter kit					Download CAD data → www.festo.com		
Combination	Drive	Gripper	Mounting option		Adapter kit		
	Size	Size			CRC ¹⁾	Part No.	Type
							
DRQD/DHRS	DRQD-...-FW	DHRS					
	6, 8, 12	10	■	■	2	187568	HAPG-34
	16 ²⁾	10	■	■		187566	HAPG-SD2-12
	16 ²⁾	16	■	■		184477	HAPG-SD2-1
	16 ²⁾	25	■	■		184478	HAPG-SD2-2
	20 ²⁾	25	■	■		184479	HAPG-SD2-3
	20 ²⁾	32	■	■		184480	HAPG-SD2-4
	25 ³⁾	25	■	■		184482	HAPG-SD2-6
	25 ³⁾	32	■	■		184483	HAPG-SD2-7
	32 ³⁾	32	■	■		184485	HAPG-SD2-9
	32 ³⁾	40	■	■		184486	HAPG-SD2-10
	40, 50	40	■	■		526027	HAPG-SD2-21
	DRQD-...ZW	DHRS					
	16	16	■	■	2	163267	HAPG-18
	16	25	■	■		163268	HAPG-19
	20	25	■	■		163269	HAPG-20
	20	32	■	■		163270	HAPG-21
	25	32	■	■		163271	HAPG-22
DRRD/DHRS	DRRD	DHRS					
	16	16	■	■	2	1979085	DHAA-G-Q11-16-B2/B3-16
	16	25	■	■		1978889	DHAA-G-Q11-16-B2/B3-25
	20	25	■	■		1978443	DHAA-G-Q11-20-B2/B3-25
	20	32	■	■		1979912	DHAA-G-Q11-20-B2/B3-32
	25	25	■	■		1801802	DHAA-G-Q11-25-B2/B3-25
	25	32	■	■		1802969	DHAA-G-Q11-25-B2/B3-32
	32	32	■	■		1979992	DHAA-G-Q11-32-B2/B3-32
	32	40	■	■		1980014	DHAA-G-Q11-32-B2/B3-40
	35, 40	40	■	■		1980059	DHAA-G-Q11-35/40-B2/B3-40

1) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

2) Possible in combination with DRQD-...-E422 (flanged shaft with energy through-feed).

3) Possible in combination with DRQD-...-E444 (flanged shaft with energy through-feed).


Radial grippers DHRS





Accessories

FESTO

Adapter kit
HMSV, HAPG, HAPS, HMVA, DHAA

Material:
Wrought aluminium alloy
Free of copper and PTFE
RoHS-compliant

 **Note**
The kit includes the individual mounting interface as well as the necessary mounting material.

Permissible drive/gripper combinations with adapter kit					Download CAD data → www.festo.com		
Combination	Drive	Gripper	Mounting option		Adapter kit		
			Size	Mounting option	CRC ¹⁾	Part No.	Type
HSP/DHRS	HSP	DHRS					
	12	10	■	—	2	192709	HAPG-60-S1
	16	10	■	—		540881	HAPG-70-B
	16	16	■	—		192706	HAPG-37-S1
	25	16	■	—		540882	HAPG-71-B
	25	25	■	—		192705	HAPG-36-S1
						540882	HAPG-71-B
						192705	HAPG-36-S1
						540883	HAPG-72-B
						193922	HAPG-37-S4
						540883	HAPG-72-B
HSW/DHRS	HSW	DHRS					
	12, 16	10	■	—	2	192706	HAPG-37-S1
	12, 16	16	■	—		540882	HAPG-71-B
						192705	HAPG-36-S1
						540882	HAPG-71-B
DSM/DHRS	DSM-...-FW	DHRS					
	6, 8, 10	10	■	■	2	187568	HAPG-34
	DSM-...	DHRS					
	12	16	■	■	2	163266	HAPG-17
	16	16	■	■		163267	HAPG-18
	16	25	■	■		163268	HAPG-19
	25	25	■	■		163269	HAPG-20
	25	32	■	■		163270	HAPG-21
	32	32	■	■		163271	HAPG-22
DSL/DHRS	DSL	DHRS					
	16	16	■	■	2	163266	HAPG-17
	20	16	■	■		163267	HAPG-18
	20	25	■	■		163268	HAPG-19
	25	25	■	■		163269	HAPG-20
	25	32	■	■		163270	HAPG-21
	32	32	■	■		163271	HAPG-22

1) Corrosion resistance class 2 according to Festo standard 940 070
Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.

Radial grippers DHRS

Accessories

FESTO






Adapter kit
HMSV, HAPG, HAPS, HMVA, DHAA

Material:
Wrought aluminium alloy
Free of copper and PTFE
RoHS-compliant



Note

The kit includes the individual mounting interface as well as the necessary mounting material.

Permissible drive/gripper combinations with adapter kit					Download CAD data → www.festo.com		
Combination	Drive	Gripper			Adapter kit		
	Size	Size	Mounting option		CRC ¹⁾	Part No.	Type
							
EGSL/DHRS	EGSL	DHRS			HMSV		
	35	10	■	■	2	548784	HMSV-54
	45, 55	16	■	■		1088262	HMSV-70
		75	25, 32	■		■	548785
							548786
ERMB/DHRS	ERMB	DHRS			HAPG		
	20	25	■	■	2	184479	HAPG-SD2-3
	25	25	■	■		184482	HAPG-SD2-6
	20	32	■	■		184480	HAPG-SD2-4
	25	32	■	■		184483	HAPG-SD2-7
	32	32	■	■		184485	HAPG-SD2-9
	32	40	■	■		184486	HAPG-SD2-10
EHMB/DHRS	EHMB	DHRS			HAPG		
	20	32	■	■	2	184485	HAPG-SD2-9
	20	40	■	■		184486	HAPG-SD2-10
	25, 32	40	■	■		526027	HAPG-SD2-21


1) Corrosion resistance class 2 according to Festo standard 940 070

Components subject to moderate corrosion stress. Externally visible parts with primarily decorative surface requirements which are in direct contact with a normal industrial environment or media such as coolants or lubricating agents.


Radial grippers DHRS

Accessories

FESTO

Ordering data						
	For size [mm]	Description	Weight [g]	Part No.	Type	PU ¹⁾
Centring sleeve ZBH Technical data → Internet: zbh						
	10, 16	For centring the gripper during mounting	1	189652	ZBH-5	10
	25		1	186717	ZBH-7	
	32		1	150927	ZBH-9	
	40		1	189653	ZBH-12	

1) Packaging unit



Ordering data				
Type	For size	Weight [g]	Part No.	Type
Position sensor SMH-S1			Technical data → Internet: smh-s1	
	10	20	175712	SMH-S1-HGR10



Signal converter/evaluation unit for position sensor SMH-S1

Signal converter SVE4

Evaluation unit SMH-AE1

- Converts analogue signals into switching points
- Switching function freely programmable with teach-in
- Threshold value, hysteresis or window comparator
- Converts analogue signals into switching points
- With 3 potentiometers for setting 3 switching points



Ordering data							
Type	For size	Input connection	Output connection	Switching output	Weight [g]	Part No.	Type
Signal converter SVE4 Technical data → Internet: sve4							
	10	Socket M8x1, 4-pin	Plug M8x1, 4-pin	2x PNP	19	544216	SVE4-HS-R-HM8-2P-M8
				2x NPN		544219	SVE4-HS-R-HM8-2N-M8
Evaluation unit SMH-AE1 Technical data → Internet: smh-ae							
	10	Socket M8x1, 4-pin	Plug M12x1, 5-pin	3x PNP	170	175708	SMH-AE1-PS3-M12
				3x NPN		175709	SMH-AE1-NS3-M12


Ordering data – Connecting cables					Technical data → Internet: nebu	
	Electrical connection, left	Electrical connection, right	Cable length [m]	Part No.	Type	
Connection between position sensor and signal converter/evaluation unit						
	Straight socket, M8x1, 4-pin	Straight plug, M8x1, 4-pin	2.5	554035	NEBU-M8G4-K-2.5-M8G4	
Connection between evaluation unit and controller						
	Straight socket, M12x1, 5-pin	Cable, open end, 5-wire	2.5	541330	NEBU-M12G5-K-2.5-LE5	
			5	541331	NEBU-M12G5-K-5-LE5	


Radial grippers DHRS


Accessories

FESTO



Ordering data – Connecting cables					Technical data ➔ Internet: nebu	
	Electrical connection, left	Electrical connection, right	Cable length [m]	Part No.	Type	
Connection between signal converter and controller						
	Straight socket, M8x1, 4-pin	Cable, open end, 4-wire	2.5	541342	NEBU-M8G4-K-2.5-LE4	
			5	541343	NEBU-M8G4-K-5-LE4	
	Angled socket, M8x1, 4-pin	Cable, open end, 4-wire	2.5	541344	NEBU-M8W4-K-2.5-LE4	
			5	541345	NEBU-M8W4-K-5-LE4	

Proximity sensor for size 16 ... 40						
Ordering data – Proximity sensors for T-slot, magneto-resistive					Technical data → Internet: smt	
	Type of mounting	Electrical connection, connection direction	Switching output	Cable length [m]	Part No.	Type
N/O contact						
	Insertable in the slot lengthwise	Cable, 3-wire, lateral	PNP	2.5	547859	SMT-8G-PS-24V-E-2,5Q-OE
		Plug M8x1, 3-pin, lateral		0.3	547860	SMT-8G-PS-24V-E-0,3Q-M8D

Proximity sensor for size 16 ... 40						
Ordering data – Position transmitters for T-slot					Technical data → Internet: smat	
	Type of mounting	Electrical connection, connection direction	Analogue output [V]	Cable length [m]	Part No.	Type
	Insertable in the slot from above	Plug M8x1, 3-pin, in-line	0 ... 10	0.3	553744	SMAT-8M-U-E-0,3-M8D

-  - Note

Mode of operation:
The position transmitter continuously senses the position of the piston. It has an analogue output with an output signal in proportion to the piston position.

Ordering data – Connecting cables					Technical data → Internet: nebu	
	Electrical connection, left	Electrical connection, right	Cable length [m]	Part No.	Type	
	Straight socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541333	NEBU-M8G3-K-2.5-LE3	
			5	541334	NEBU-M8G3-K-5-LE3	
	Angled socket, M8x1, 3-pin	Cable, open end, 3-wire	2.5	541338	NEBU-M8W3-K-2.5-LE3	
			5	541341	NEBU-M8W3-K-5-LE3	